
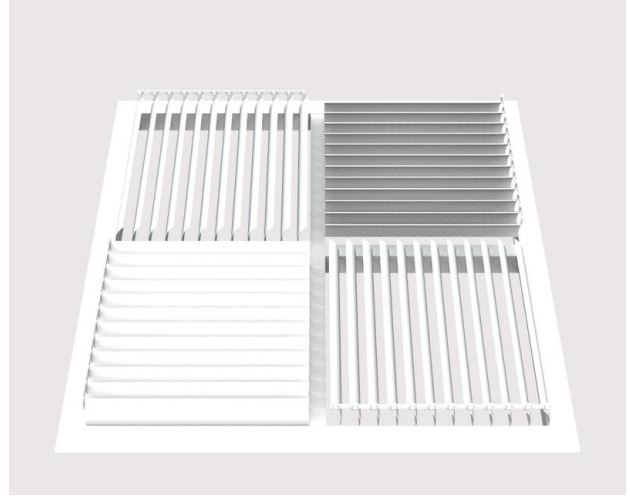


FOUR WAY SWIRL DIFFUSERS-CKD-08

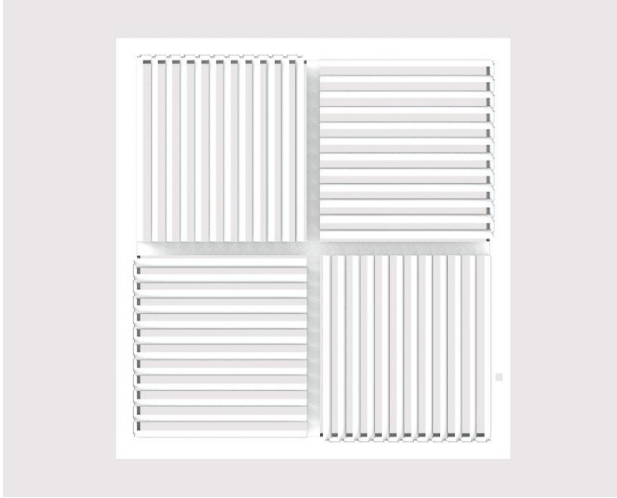

AREAS OF USE AND FEATURES: It is used as blowing diffusers in Hvac systems and high ceilings. It is suitable for vertical use. It can be used for heating and cooling. With the help of the arm, the shooting distance can be adjusted between 3m-15m. In fixed wing applications, the shooting distance is max. 5 m. It is suitable for servo motor use. It is standard screw mounted. The way of mounting can be changed optionally.

MATERIAL: Frame and wings are made of aluminum profile by the extrusion method.



SURFACE COATING: The product can be manufactured in any color with electrostatic powder paint.

ACCESSORIES: Plenum box

STANDAT DIMENSIONS -mm

MODEL	A	B	C	D
420*420	420*420	485*485	410*410	410*410
595*595	530*530	595*595	520*520	520*520
770*770	770*770	835*835	760*760	760*760
1040*1040	1040*1040	1150*1150	1030*1030	1030*1030

TECHNICAL INFORMATION

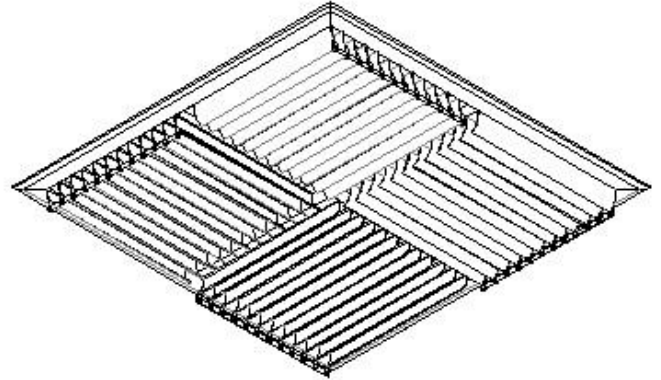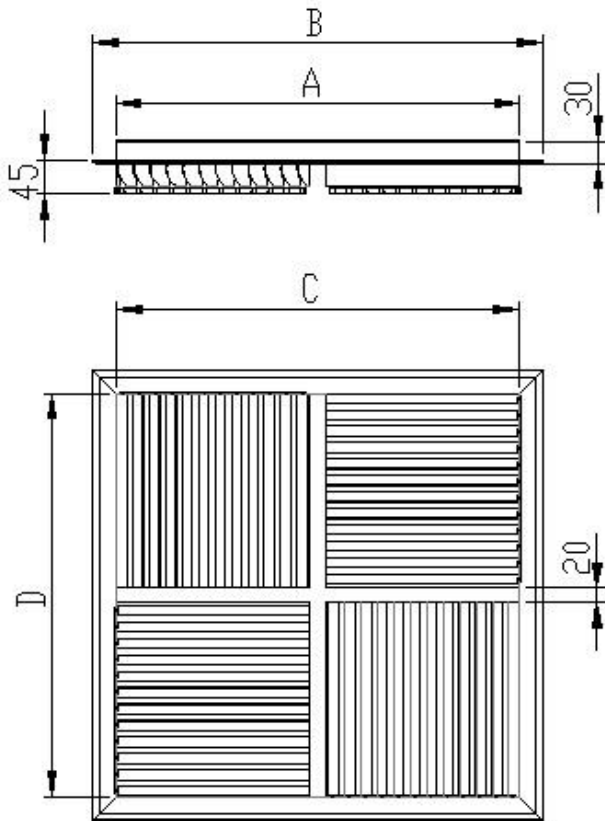

AIR FLOWS BY WING ANGLES:

